



1441 South Main St. | North Canton, Ohio 44720  
 Phone: 330.368.4200 | Fax: 330.368.4224

**MARKETING BULLETIN**  
 Date: 08-18-2014 • MB2014030-A


## Advance Harrow Track I-1



We are pleased to announce that our Advance Harrow Track I-1 is now available in a 16.5L-16.1. Orders are now being accepted for both the 10ply and 14ply.

**Features include:**

- Outstanding flotation use
- Easy steering from the heavy grooved ribs
- Extra wide design

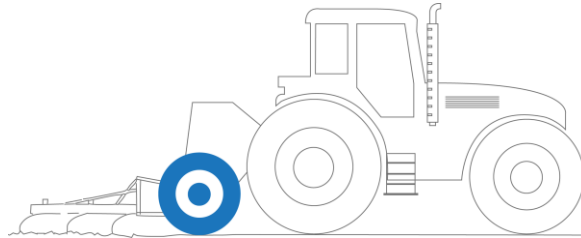

Cat #	Size	Type	Design	GTC Pattern	Ply Rating	Speed Symbol	Load Index	Section Width (in.)
97254G	16.5L-16.1	Tubless	Advance Harrow Track I-1	I-1	10	B	N/A	16.5
97255G	16.5L-16.1	Tubless	Advance Harrow Track I-1	I-1	14	B	N/A	16.5

Cat #	Size	Overall Diam. (in.)	Max Speed	Infl. Pressure (psi)	Max. Load (lbs.)	Standard Rim	Tread Depth (32nds)	Tire Weight (lbs)
97254G	16.5L-16.1	40.3	31	36	2360	14	15	84
97255G	16.5L-16.1	40.3	31	48	2900	14	15	89