



1441 South Main St. | North Canton, Ohio 44720  
 Phone: 330.368.4200 | Fax: 330.368.4224

**MARKETING BULLETIN**  
 Date: 09-18-2014 • MB2014034-A


## New Advance I-3D Implement Backhoe Tire



We are pleased to announce that our new Advance I-3D Backhoe tire is now available in a 16.5L-16.1-10. Orders are now being accepted.

**Features include:**

- Moderate traction tread, drive wheel.
- Traction implement backhoe service.

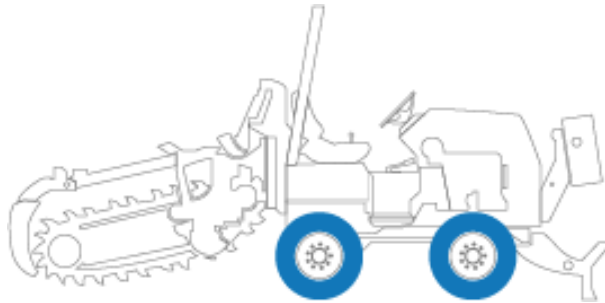

Cat #	Size	Type	Design	GTC Pattern	Ply Rating	Speed Symbol	Load Index	Section Width (in.)
59025G	16.5L-16.1	TL	Advance Backhoe I-3D	I-3D	10	A8	N/A	16.5
Cat #	Size	Overall Diam. (in.)	Max Speed	Infl. Pressure (psi)	Max. Load (lbs.)	Standard Rim	Tread Depth (32nds)	Tire Weight (lbs)
59025G	16.5L-16.1	41.2	25	40	5680	14	29	116