



1441 South Main St. | North Canton, Ohio 44720
 Phone: 330.368.4200 | Fax: 330.368.4224

MARKETING BULLETIN
 Date: 09-26-2014 • MB2014041-A


New Advance Farm Radial R-1W



We are pleased to announce that our Advance Farm Radial R-1W is now available in a 14.9R30 as well as an 18.4R42. Orders are now being accepted.

Features include:

- Bar angle provides superior traction in the field and good wear during road transportation.
- Heavy duty design for excellent ride, snag resistance and long wear.
- Radial design construction.

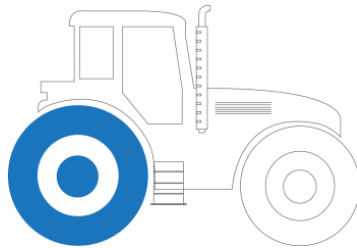

Cat #	Size	Type	Design	GTC Pattern	Ply Rating	Speed Symbol	Load Index	Section Width (in.)
96110G	14.9R30	TL	Advance Radial R-1W	R-1W	n/a	A8	129	14.9
96115G	18.4R42	TL	Advance Radial R-1W	R-1W	n/a	A8	148	18.4
Cat #	Size	Overall Diam. (in.)	Max Speed	Infl. Pressure (psi)	Max. Load (lbs.)	Standard Rim	Tread Depth (32nds)	Tire Weight (lbs)
96110G	14.9R30	55.1	25	23	4070	W13	58.0	196
96115G	18.4R42	72.8	25	23	6940	W16	65.5	373