



Mix and match your tire order per shipping container! Authorized distributors can mix and match any type of our Samson or Advance branded tires in one container shipment, including: MTR/Mobile Crane, Bias Truck, OTR/Logging, Industrial, Farm/Skid Steer and Solid/Giant Solid.

1441 South Main St. | North Canton, Ohio 44720
 Phone: 330.368.4200 | Fax: 330.368.4224

MARKETING BULLETIN
 Date: 1-26-2015 • MB201510-S


New Samson Radial GLR08



We are pleased to announce our Samson Radial GLR08 is now available. Orders are now being accepted!

Features Include:

- Increased cut resistance to punctures
- Longer tread life
- Increased casing durability
- Enhanced traction on all types of surface

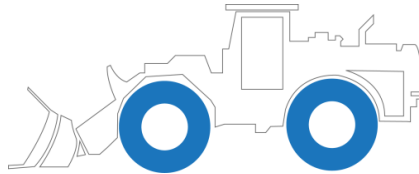

Cat #	Size	Type	Design	GTC Pattern	Star Rating	Speed Symbol	Load Index	Section Width (in.)
41704-2	20.5R25	TL	★ GLR08 TL L5,2S,RC Samson	GLR08 L5	★	A2	186	20.9
41705-2	20.5R25	TL	★★ GLR08 TL L5,2S,RC Samson	GLR08 L5	★★	A2	193	20.9
41706-2	23.5R25	TL	★ GLR08 TL L5,2S,RC Samson	GLR08 L5	★	A2	195	24.0
41708-2	23.5R25	TL	★★ GLR08 TL L5,2S,RC Samson	GLR08 L5	★★	A2	201	24.0
41714-2	29.5R25	TL	★ GLR08 TL L5,2S,RC Samson	GLR08 L5	★	A2	208	29.5
41715-2	29.5R25	TL	★★ GLR08 TL L5,2S,RC Samson	GLR08 L5	★★	A2	216	29.5

Cat #	Size	Overall Diam. (in.)	Max Speed	Infl. Pressure (psi)	Max. Load (lbs.)	Standard Rim	Tread Depth (32nds)	Tire Weight (lbs)
41704-2	20.5R25	58.4	6	73	20900	17.00	89.4	804
41705-2	20.5R25	58.4	6	94	11500	17.00	89.4	804
41706-2	23.5R25	65.4	6	73	26800	19.50	97.0	1036
41708-2	23.5R25	65.4	6	94	14500	19.50	97.0	1036
41714-2	29.5R25	73.2	6	73	39700	25.00	123.5	1785
41715-2	29.5R25	73.2	6	94	49400	25.00	123.5	1785