



1441 South Main St. | North Canton, Ohio 44720
Phone: 330.368.4200 | Fax: 330.368.4224

MARKETING BULLETIN
Date: 07-11-2016 • MB2011012-A


New Advance Farm R-1S Sizes Available



We are pleased to announce the addition of 18 new sizes to our Advance Farm R-1S tire line. Orders are now being accepted.

Features and Benefits of the R-1S Include:

- Bar angle provides superior traction in the field.
- Heavy duty design for snag resistance and long wear.
- Variety of sizes for use with tractors, and combines.
- Deeper tread. Long bar/short bar

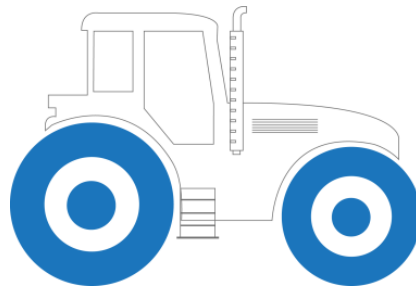

Please see page #2 for complete technical data:



GTCNA

GTC NORTH AMERICA

4580 Stephen Circle N.W. • Suite 202 • Canton, Ohio 44718

Phone: 330.498.5000 • Fax: 330.498.5002

MARKETING BULLETIN
Date: 07-11-2016 • MB2011012-A

Cat #	Size	Type	Design	GTC Pattern	Ply Rating	Speed Symbol	Load Index	Section Width (in.)
96005G	6.00-16	TT	ADVANCE R-1S	R-1S	6	A6	NA	6.5
96007G	6.50-16	TT	ADVANCE R-1S	R-1S	6	A6	NA	7.1
96009G	7.50-16	TT	ADVANCE R-1S	R-1S	8	A6	NA	8.1
96012G	13.6-24	TT	ADVANCE R-1S	R-1S	8	A6/*A8	NA	13.6
96014G	14.9-26	TT	ADVANCE R-1S	R-1S	10	A6/*A8	NA	14.9
96034G	23.1-26	TT	ADVANCE R-1S	R-1S	12	A6/*A8	NA	23.2
96040G	11.2-28	TT	ADVANCE R-1S	R-1S	6	A6/*A8	NA	11.2
96042G	12.4-28	TT	ADVANCE R-1S	R-1S	10	A6/*A8	NA	12.4
96044G	18.4-28	TT	ADVANCE R-1S	R-1S	10	A6/*A8	NA	18.4
96046G	14.9-30	TT	ADVANCE R-1S	R-1S	10	A6/*A8	NA	14.9
96048G	16.9-30	TT	ADVANCE R-1S	R-1S	12	A6/*A8	NA	16.9
96050G	23.1-30	TT	ADVANCE R-1S	R-1S	12	A6	NA	23.1
96052G	9.5-32	TT	ADVANCE R-1S	R-1S	8	A6	NA	9.4
96054G	16.9-34	TT	ADVANCE R-1S	R-1S	10	A6/*A8	NA	16.9
96056G	12.4-36	TL	ADVANCE R-1S	R-1S	12	A6	NA	12.4
96058G	11.2-38	TT	ADVANCE R-1S	R-1S	12	A6	NA	11.2
96060G	16.9-38	TT	ADVANCE R-1S	R-1S	10	A6	NA	16.9
96062G	20.8-42	TT	ADVANCE R-1S	R-1S	12	A6/*A8	NA	20.8

Cat #	Size	Overall Diam. (in.)	Max Speed	Infl. Pressure (psi)	Max. Load (lbs.)	Standard Rim	Tread Depth (32nds)	Tire Weight (lbs)
96005G	6.00-16	29.3	20	36	1090	4.50	34.0	28
96007G	6.50-16	30.1	20	36	1245	5.00	34.0	31
96009G	7.50-16	31.9	20	42	1655	5.50	34.0	35
96012G	13.6-24	47.6	20/*25	30/*28	3405/*3080	12.00	46.6	95
96014G	14.9-26	51.8	20/*25	33/*32	4530/*4080	13.00	47.9	131
96034G	23.1-26	63.2	20/*25	24/*24	7960/*7150	20.00	53.7	346
96040G	11.2-28	47.4	20/*25	26/*26	2460/*2200	10.00	44.1	92
96042G	12.4-28	49.6	20	41	3725	11.00	45.4	109
96044G	18.4-28	59	20/*25	26/*26	5985/*5360	16.00	52.3	217
96046G	14.9-30	55.7	20/*25	33/*32	4830/*4300	13.00	47.9	149
96048G	16.9-30	58.5	20/*25	35/*33	6000/*5520	15.00	49.1	194
96050G	23.1-30	67.1	20	24/*24	8490/*7600	20.00	53.7	365
96052G	9.5-32	49.2	20	41	2780	8.00	41.6	88
96054G	16.9-34	62.4	20/*25	29/*28	5740/*5200	15.00	49.1	205
96056G	12.4-36	57.7	20	48	4685	11.00	45.4	153
96058G	11.2-38	57.4	20	49	4155	10.00	44.1	128
96060G	16.9-38	66.3	20	29	6085	15.00	49.1	237
96062G	20.8-42	76.2	20/*25	28/*26	8250/*8050	18.00	52.9	385