



Mix and match your tire order per shipping container! Authorized distributors can mix and match any type of our Samson or Advance branded tires in one container shipment, including: MTR/Mobile Crane, Bias Truck, OTR/Logging, Industrial, Farm/Skid Steer and Solid/Giant Solid.

1441 South Main St. | North Canton, Ohio 44720  
 Phone: 330.368.4200 | Fax: 330.368.4224

**MARKETING BULLETIN**  
 Date: 1-7-2016 • MB201603-S


## New Samson Radial GLR09



We are pleased to introduce additional sizes to our Samson Radial GLR09 tire line. Orders are now being accepted!

**Features Include:**

- Excellent puncture-resistance in the toughest conditions.
- Superior traction and braking performance
- Designed for use as an all-position tire in moderate to severe applications.

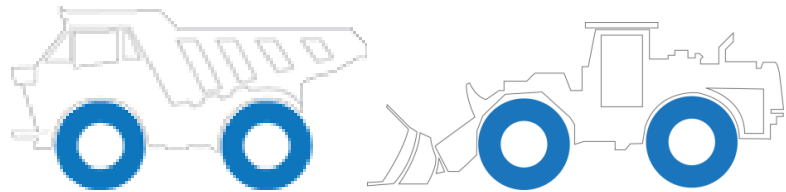

Cat #	Size	Type	Design	GTC Pattern	Star Rating	Speed Symbol	Load Index	Section Width (in.)
41510-2	17.5R25	TL	★ GLR09 (G-3/L-3)	GLR09	★	A2/*A8	176/*153	17.3
41512-2	20.5R25	TL	★/★★ GLR09 (E-3/L-3)	GLR09	★/★★	A2/*B	186/*177	20.0
41513-2	26.5R25	TL	★/★★ GLR09 (E-3/L-3)	GLR09	★/★★	A2/*B	202/*193	26.0
41514-2	29.5R25	TL	★/★★ GLR09 (E-3/L-3)	GLR09	★/★★	A2/*B	208/*200	29.3
41516-2	16.00R25	TL	★★ GLR09 (E4)	GLR09	★★	B	177	17.7

Cat #	Size	Overall Diam. (in.)	Max Speed	Infl. Pressure (psi)	Max. Load (lbs.)	Standard Rim	Tread Depth (32nds)	Tire Weight (lbs)
41510-2	17.5R25	52.8	6/*25	73/*44	15650/*8040	14	36.5	382
41512-2	20.5R25	57.9	6/*31	73/*76	20900/*16090	17	41.6	557
41513-2	26.5R25	68.5	6/*31	73/*76	33100/*25400	22	47.9	957
41514-2	29.5R25	72.8	6/*31	73/*76	39700/*30900	25	54.2	1277
41516-2	16.00R25	60.2	31	94	16090	11.25	35.3	636