



1441 South Main St. | North Canton, Ohio 44720  
 Phone: 330.368.4200 | Fax: 330.368.4224

**MARKETING BULLETIN**  
 Date: 04.17.2017 • MB201714-A


## New Sizes Added to Our GL909A



We are pleased to introduce 2 new sizes that have been added to our Advance GL909A Radial Truck Tire line.

**Features include:**

- Designed for use as an all-position tire in moderate to severe applications.
- Robust center blocks and optimized lateral grooves ensure superior traction and braking performance even under the most demanding circumstances.
- Tread compound designed for chip and tear resistance, and also provides reduced heat build-up resulting in longer service life.
- Short/Mid Haul Mixed Service

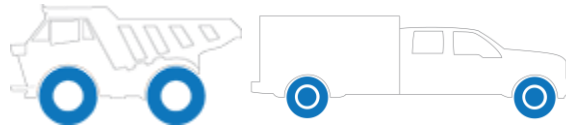

Cat #	Size	Type	Design	GTC Pattern	PLY Rating	Speed Symbol	Load Index	Section Width (in.)
87232G	235/75R17.5	TBLS	ADVANCE RADIAL GL909A	GL909A	16	J	S143/D141	9.2
87230G	13R22.5	TBLS	ADVANCE RADIAL GL909A	GL909A	18	E	S154/D151	12.6

Cat #	Size	Overall Diam. (in.)	Max Speed	Infl. Pressure (psi)	Max. Load (lbs.)	Standard Rim	Tread Depth (32nds)	Tire Weight (lbs)
87232G	235/75R17.5	31.4	62.0	125	S6005/D5675	6.75	22.7	71.91
87230G	13R22.5	44.7	43.0	120	S8270/D7610	9.75	31.5	185.21