



1441 South Main St. | North Canton, Ohio 44720
 Phone: 330.368.4200 | Fax: 330.368.4224

MARKETING BULLETIN
 Date: 04.21.2017 • MB201722-S


New Samson Radial GL908A



We are pleased to introduce our Samson GL908A Radial Truck Tire.

Features include:

- Special tread pattern provides additional traction on mining roads
- Extra deep tread pattern for longer service life
- Specialized stone rejecter design and thick sidewall protection
- Extra strong tread provides tire with optimal carrying capacity and resistance to bead blowouts

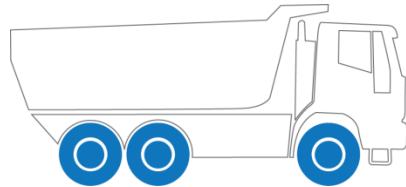

Cat #	Size	Type	Design	GTC Pattern	PLY Rating	Speed Symbol	Load Index	Section Width (in.)
88930-2	8.25R20	TT	SAMSON RADIAL GL908A	GL908A	16	J	S139/D137	9.3
88932-2	9.00R20	TT	SAMSON RADIAL GL908A	GL908A	16	F	S144/D142	10.2
88935-2	295/80R22.5	TL	SAMSON RADIAL GL908A	GL908A	16	K	S150/D146	11.7
88937-2	10.00R20	TT	SAMSON RADIAL GL908A	GL908A	18	F	S149/D146	10.8
88939-2	11.00R20	TT	SAMSON RADIAL GL908A	GL908A	18	F	S152/D149	11.5
88941-2	12.00R20	TT	SAMSON RADIAL GL908A	GL908A	18	F	S154/D151	12.3
Cat #	Size	Overall Diam. (in.)	Max Speed	Infl. Pressure (psi)	Max. Load (lbs.)	Standard Rim	Tread Depth (32nds)	Tire Weight (lbs)
88930-2	8.25R20	38.3	62	135	S5355/D5070	6.50	26.5	108.37
88932-2	9.00R20	40.1	50	130	S6175/D5840	7.00	27.1	131.23
88935-2	295/80R22.5	41.1	68	115	S7390/D6610	9.00	25.2	134.49
88937-2	10.00R20	41.4	50	135	S7160/D6610	7.50	30.2	159.39
88939-2	11.00R20	42.7	50	135	S7830/D7160	8.00	31.5	189.82
88941-2	12.00R20	44.2	50	120	S8270/D7610	8.50	31.5	216.74